

Sanicondens Clim Mini



6 m
↑




See page 10

PRODUCT BENEFITS

- Compact unit for discreet installation
- Low noise level, only 21 dB(A)
- Safety system with thermal protector and overflow alarm
- Easy to check, transparent base

CONNECTIONS

- (A) condensate tank
- (B) level sensor
- (C) pump unit
- (D) anti-siphoning vacuum breaker
- (E) waste water pipe




PACK CONTAINS

Sanicondens Clim Mini pump, detection unit, 1.2 m flexible hose, mounting bracket, vent tube, power cable supplied


CURVE

Discharge height (m)

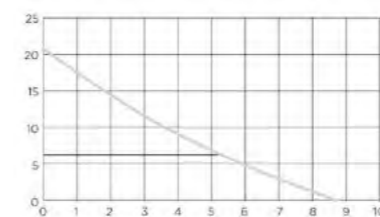

Flow rate (l/h)

DIMENSIONS

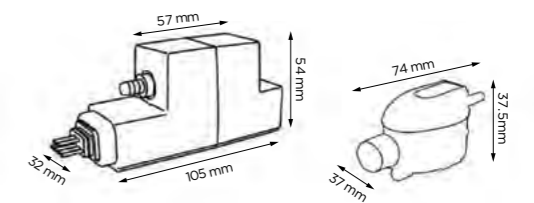

Dimensions (mm)

TECHNICAL FEATURES

Max. power of the boiler	8 kW
Inlet diameter DN	16 mm
Discharge diameter DN	6 mm
Max. flow rate	9 l/h +/-15%
Max. incoming temperature	35°C
Max. suction distance between the detection bloc and the pump	2 m
Voltage - Frequency	220-240 V - 50-60 Hz
Max. power consumption	22 W
IP rating	IP24
Noise level	21 dB(A)
Identification and logistics	
Barcode	3308815083520
Product code	1131