

Sanicondens Clim Pack



6 m
↑




See page 10

PRODUCT BENEFITS

- Complete solution for neat installation
- Easy installation, fixing and connection accessories are included
- Reversible plate for right or left installation

CONNECTIONS

- (A) condensate tank
- (B) level sensor
- (C) pump unit
- (D) anti-siphoning vacuum breaker
- (E) waste water pipe



TECHNICAL FEATURES


Max. power of the boiler	8 kW
Inlet diameter DN	16 mm
Discharge diameter DN	6 mm
Max. flow rate	9
Max. incoming temperature	35°C
Max. suction distance between the detection bloc and the pump	2 m
Voltage - Frequency	220-240 V - 50-60 Hz
Max. power consumption	22 W
IP rating	IP24
Noise level	21 dB(A)
Identification and logistics	
Barcode	3308815083919
Product code	1132

PACK CONTAINS

Sanicondens Clim Pack pump, detection unit, trunking, 1.2 m flexible hose, mounting bracket, vent tube, power cable supplied


CURVE

Discharge height (m)

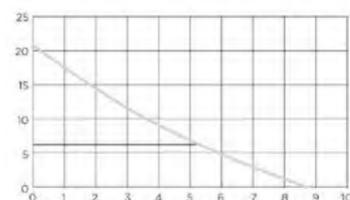

Flow rate (l/h)

DIMENSIONS

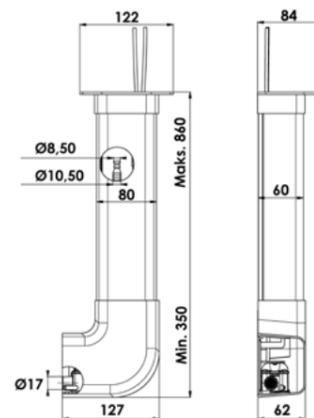

Dimensions (mm)

