

BOILER PUMPS

APPLICATIONS



Boiler



Air conditioning



Air conditioner unit with ceiling cassette



Refrigerated display case



Dehumidifier

PUMPING DISTANCE

4.5 m



WARRANTY



Product Code:
1082/5

Barcode:
EAN 3308815013121



SANICONDENS® Pro



Flexibility: can be used with gas or oil boilers (using Sanineutral or Sanineutral mini) floor and wall boilers, air conditioning units, dehumidifiers, refrigerated display cases.


Easy installation:
Complete installation kit supplied with non-return valve and alarm pre-connection.



Large tank volume means less frequent pumping .

Quiet operation.


SEMI-TRANSPARENT VIEW

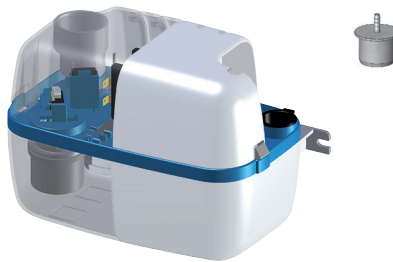

TECHNICAL FEATURES

Ø inlet	28 mm
Number of possible inlets	2
Ø discharge pipework	8 mm
Tank volume	2 l
Maximum flow	342 l/h
Maximum incoming water temperature	80°C (S3 15%)
Max power of gas boiler	50 kW
Max power of oil boiler	35 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Max current	0.52 A
Electrical class	Single phase
IP rating	IP20
Weight	2.7 kg
Low noise level	< 45dB (A)

PUMP CURVE

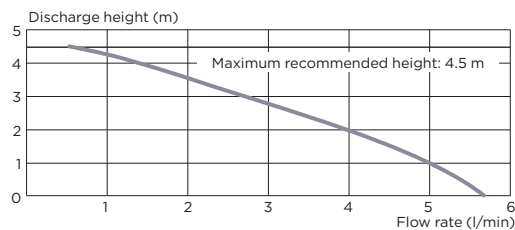

PACKAGING

SANICONDENS® Pro

Check valve supplied

Comes with: fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (6m) and 1 power cable of 2m, 1 rubber stopper, 1 alarm pre-connection cable

For more technical information visit, www.saniflo.co.uk