



SANISPEED[®] +



Ideal for installing in a restaurant kitchen.

Low activation level.

Flowrate: 100 L/min.



Pump suitable for installing in a commercial kitchen.

Low noise level: 42dB (A).

Suitable for a water softener.

APPLICATIONS



Basin



Bath



Shower



Bidet



Washing machine



Dishwasher



Sink

PUMPING DISTANCE



WARRANTY



Product Code:
6045

Barcode:
EAN 3308815074054

SEMI-TRANSPARENT VIEW




TECHNICAL FEATURES

Activation level	95 mm
Shower tray height	150 mm
Maximum flow rate	100 L/min
Low noise level	42dB(A)
Number of entries	4
Ø inlet	40 mm
Ø discharge pipework	32 mm
Voltage	220-240V/50Hz
Motor power	400W
Maximum current	2 A
Electrical class	Single phase
Maximum temperature	75°C intermittently (max. 5 min)
IP rating	IP44
Weight	6.1 kg

PUMP CURVE

Discharge height (m)

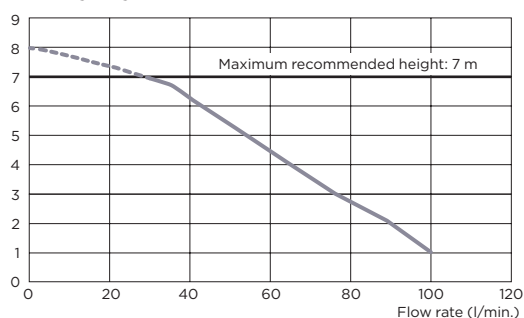

PACKAGING

- Pump
- Non-return valve
- Connectors
- Activated carbon filter included, to neutralise odours

