


Sanicondens Eco



See page 10




PRODUCT BENEFITS

- Compact and quiet solution
- Connections possible with gas and oil boilers (using the Sanineutral or Sanineutral Mini), floor and wall-mounted units, refrigerated display cabinets, air conditioners, air conditioning units and dehumidifiers
- Easy installation: fixing kit supplied

CONNECTIONS

- ← Discharge diameter (int.): 10 mm
- Inlet diameter DN: 28 mm



PACK CONTAINS

Sanicondens Eco, non-return valve, fixing screws, 1 inlet adapter, 1 drain hose (5 m), 1 power cable 1.5 m, 1 outlet adapter

CURVE

Discharge height (m)




Flow rate (l/min)

TECHNICAL FEATURES

Max. power of boiler	Oil 30, Gas 50 kW
Number of inlets	2
Inlet diameter DN	28 mm
Discharge diameter (int.)	10 mm
Tank volume	2.2 L
Max. incoming temperature	80°C (S3 15%)
Voltage - Frequency	220-240 V - 50-60 Hz
Max. power consumption	60 W
Maximum current	0.52 A
Electrical class	I
IP rating	IP24
Noise level	< 45 dB(A)
Identification and logistics	
Gross weight	2.5 kg
Barcode	3308815083681
Product code	1141

DIMENSIONS

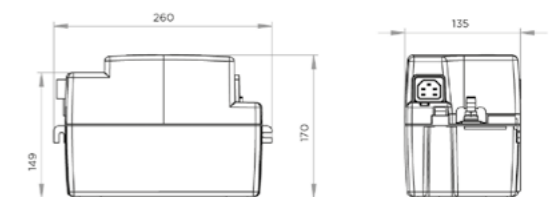

Dimensions (mm)